
Intermergato |

Rotating Demolition Grab TG15 RMR6 – TG30DG XR600





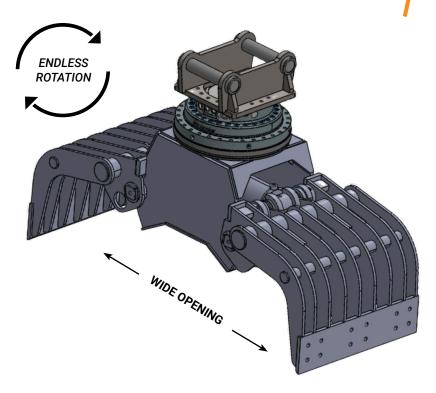

KEY FEATURES

Aussie-Made Head Bracket

- Low-profile, bolt-on design
- Custom-built to suit your excavator

Rotator RMR Series - Made in Austria

- Gerotor technology
- Forged shaft for high axial/radial loads
- Built for long life in tough conditions

Rotator XR Series - Made in Sweden

- New-gen vane drive
- Low profile for improved lift & balance
- Heavy-duty bearings, low maintenance

European-Engineered Grapple

- Built for fast, efficient demolition and on-site sorting
- Save on landfill costs by sorting mixed materials with ease
- Fully HARDOX ribbed chassis ultra-tough & wear-resistant
- Reversible 500HB HARDOX cutting edges for extended life
- TG20DG & up: self-lubricating graphite bushes
- **High-pressure hydraulic cylinder** for powerful, reliable clamping

Tough enough to tear it down. Smart enough to clean it up.
Contact us today.

MODEL SPECIFICATIONS	RIGID MOUNTING ton	WEIGHT INCL HEADBRACKET	GRIP AREA	PRESSURE	FLOW //min	CLAMPING	OPENING WIDTH	CUTTING EDGE WIDTH	ROTATOR	TORQUE
TG15DG RMR6	3.5-6.0	275	0.14	250	+30	18	1154	390	RMR6	2800
TG15DG RMR12	6.0-8.0	310	0.14	250	+30	18	1154	390	RMR12	3800
TG18DG RMR12	8.0-12	510	0.18	250	+30	19	1430	530	RMR12	3800
TG20DG XR350	10-16	870	0.20	300	60	33	1560	530	XR350	4350
TG25DGL XR400	14-24	1175	0.35	300	90	57	1940	800	XR400	4100
TG25DG XR600	18-26	1400	0.35	300	90	57	1940	800	XR600	7000
TG30DG XR600	22-32	2000	0.50	300	90	69	2350	1000	XR600	7000



High performance lift and load attachments for Forestry, Transport, Construction and Recycling.







