


HIGH
TORQUE
WORM DRIVE

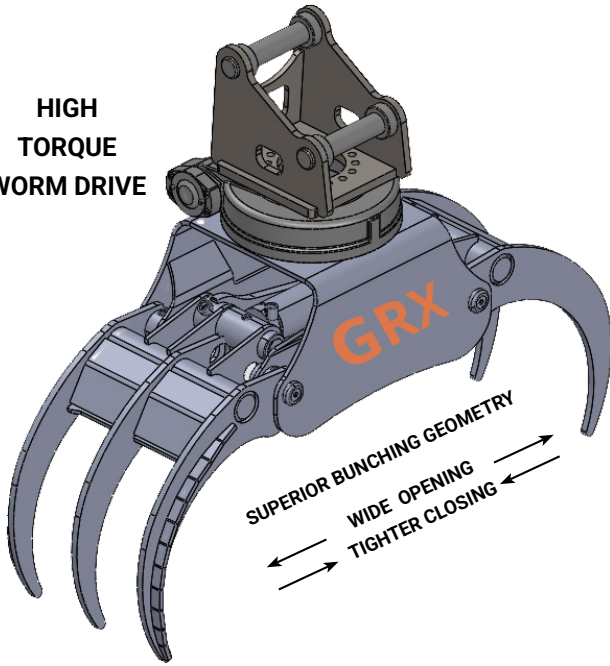

KEY FEATURES

Head Bracket - Aussie Made

- Bolt-on, flat for tilt hitch or angled for upright tree/pole handling

Grapple - Made in Europe










- Hardox for strength and durability
- Exclusive long finger design for better penetration and material control
- Optimized geometry for better bunching
- Hydraulic – operates independently from the dipper for full range of movement

Worm Drive Rotator

- 360° rotation with specially designed low gearing for a long life
- NSL – non self-locking design protects worm drive
- Holds load at any angle (optional brake)
- Feed chippers without moving the machine
- Grip trees upright, then lower safely

Optional solenoid if only one set of auxiliaries available



| KOBELCO MODELS | MODEL SPECIFICATIONS | RIGID | WEIGHT | GRIP AREA | PRESSURE | FLOW | CLAMPING | OPENING WIDTH | CLOSING WIDTH | WORM DRIVE ROTATOR |
|---------------------------------|----------------------|---|---|---|---|---|---|---|---|---|
| | |  |  |  |  |  |  |  |  |  |
| SK12SR & SK17SR | GRX10-5 WD7 | 1.5-2 | 125 | 0.11 | 200 | 15-30 | 7.2 | 976 | 60 | WD7 |
| SK20SR, SK26SR, SK28SR & SK30SR | GRX15-5 WD7 | 2.0-3.5 | 185 | 0.14 | 200 | 20 | 7.2 | 940 | 63 | WD7 |
| SK35SR & SK45SR | GRX20-5 WD9 | 3.5-5.5 | 285 | 0.19 | 200 | 30 | 11.3 | 1234 | 78 | WD9 |
| SK45SR & SK55SR | GRX25-5 WD9 | 5.0-7.5 | 375 | 0.24 | 250 | 40 | 15 | 1385 | 85 | WD9 |
| SK75SR & SK85MSR | TG28SR5 WD14 | 7.0-12 | 500 | 0.30 | 250 | 60 | 15 | 1500 | 95 | WD14 |
| SK85MSR & SK100MSR | GRX30-5 WD14/2 | 8.0-12 | 480 | 0.29 | 300 | 50 | 18.3 | 1587 | 105 | WD14 /2 |
| SK135SR, SK140LC & SK140RLC | TG42SR5 WD17/2 | 12-16 | 650 | 0.50 | 250 | 70 | 25 | 1895 | 100 | WD17/2 |
| SK140SRL & ED160BR | TG55SR5 WD21/2 | 16-21 | 1235 | 0.65 | 250 | 90 | 25 | 2425 | 150 | WD21/2 |
| HEAVY DUTY OPTION | | | | | | | | | | |
| SK135SR, SK140 & ED160BR | GX28-50/5 WD17/2 | 12-18 | 800 | 0.28 | 350 | 60 | 20 | 1486 | 130 | WD17/2 |
| SK180, SK200 & SK210 | GX36-50/5 WD21/2 | 18-24 | 1250 | 0.36 | 350 | 60 | 20 | 1800 | 135 | WD21/2 |
| SK235, SK250 & SK270 | GX36-50/5 WD25/2 | 24-30 | 1350 | 0.36 | 350 | 60 | 20 | 1800 | 135 | WD25/2 |
| SK260LC, SK300LC & SK300LC | GX55-50/5 WD25/2 | 24-32 | 2500 | 0.50 | 350 | 70 | 50 | 2295 | 145 | WD25/2 |