


HIGH TORQUE WORM DRIVE

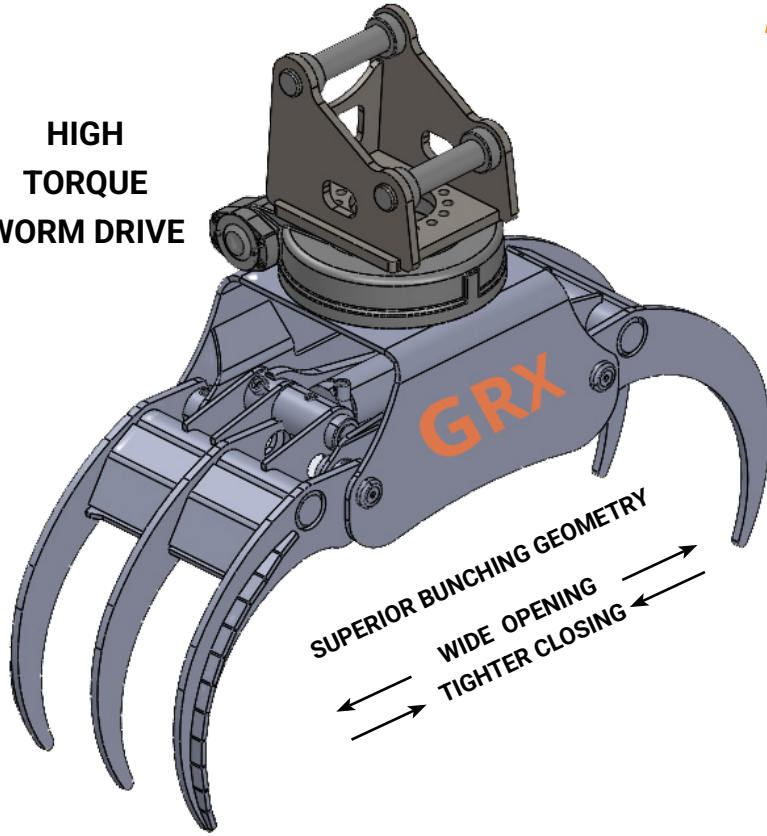

KEY FEATURES

Head Bracket - Aussie Made

- Bolt-on, flat for tilt hitch or angled for upright tree/pole handling










Grapple - Made in Europe

- Hardox for strength and durability
- Exclusive long finger design for better penetration and material control
- Optimized geometry for better bunching
- Hydraulic – operates independently from the dipper for full range of movement

Worm Drive Rotator

- 360° rotation with specially designed low gearing for a long life
- NSL – non self-locking design protects worm drive
- Holds load at any angle (optional brake)
- Feed chippers without moving the machine
- Grip trees upright, then lower safely

Optional solenoid if only one set of auxiliaries available

KUBOTA MODELS	MODEL SPECIFICATIONS	RIGID 	WEIGHT 	GRIP AREA 	PRESSURE 	FLOW 	CLAMPING 	OPENING WIDTH 	CLOSING WIDTH 	WORM DRIVE ROTATOR 
U17 & KX018	GRX10-5 WD7	1.5-2	125	0.11	200	15-30	7.2	976	60	WD7
U25, U27, KX033 & U35	GRX15-5 WD7	2.0-3.5	175	0.14	200	20	7.2	940	63	WD7
U35, KX040 & U48	GRX20-5 WD9	3.5-5.0	285	0.19	200	30	11.3	1234	78	WD9
U55 & KX057	GRX25-5 WD9	5.0-7.5	375	0.24	250	40	15	1385	85	WD9
KX080	TG28SR5 WD14	7.0-12	500	0.30	250	60	15	1500	95	WD14

