


**HIGH
TORQUE
WORM DRIVE**

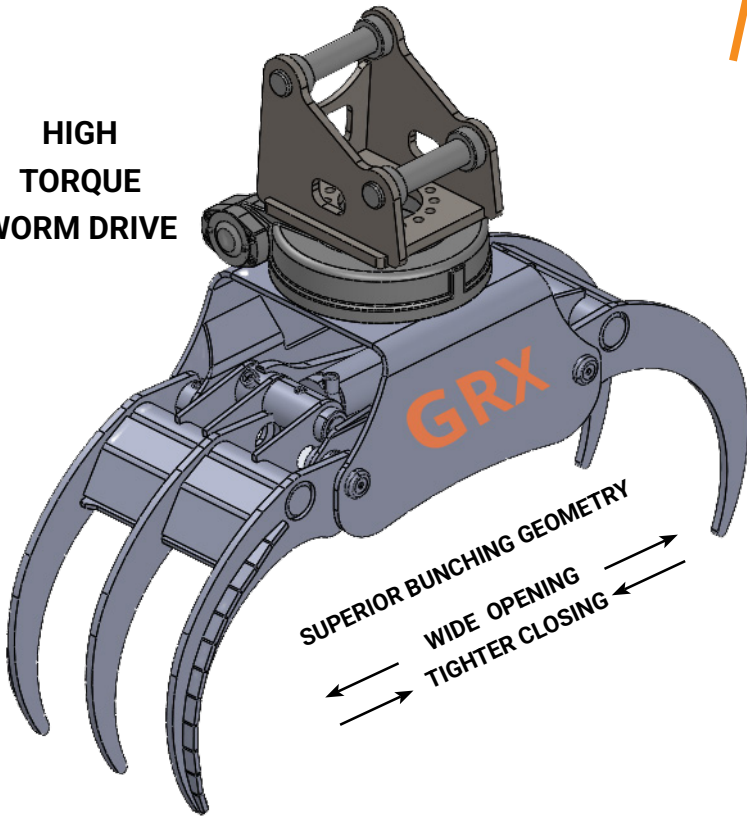

KEY FEATURES

Head Bracket - Aussie Made

- Bolt-on, flat for tilt hitch or angled for upright tree/pole handling










Grapple - Made in Europe

- Hardox for strength and durability
- Exclusive long finger design for better penetration and material control
- Optimized geometry for better bunching
- Hydraulic – operates independently from the dipper for full range of movement

Worm Drive Rotator

- 360° rotation with specially designed low gearing for a long life
- NSL – non self-locking design protects worm drive
- Holds load at any angle (optional brake)
- Feed chippers without moving the machine
- Grip trees upright, then lower safely

Optional solenoid if only one set of auxiliaries available

TAKEUCHI MODELS	MODEL SPECIFICATIONS	RIGID  ton	WEIGHT  Kg	GRIP AREA  m ²	PRESSURE  Bar	FLOW  l/min	CLAMPING  kN	OPENING WIDTH 	CLOSING WIDTH 	WORM DRIVE ROTATOR 
TB216, TB217R & TB20E	GRX10-5 WD7	1.5-2	125	0.11	200	15-30	7.2	976	60	WD7
TB320, TB225, TB325	GRX15-5 WD7	2.0-3.5	185	0.14	200	20	7.2	940	63	WD7
TB335R	GRX20-5 WD9	3.5-5.0	285	0.19	200	30	11.3	1234	78	WD9
TB350R, TB260, TB257FR & TB370	GRX25-5 WD9	5.0-7.5	375	0.24	250	40	15	1385	85	WD9
TB370W, TB290 & TB280FR	TG28SR5 WD14	7.0-12	500	0.30	250	60	15	1500	95	WD14
TB290, TB280FR & TB395W	GRX 30-5 WD14/2	8.0-12	480	0.29	300	50	18.3	1587	105	WD14 /2
TB2150R	TG42SR5 WD17/2	12-16	650	0.50	250	70	25	1895	100	WD17/2

HEAVY DUTY OPTION

TB2150R	GX28-50/5 WD17/2	12-18	800	0.28	350	60	20	1486	130	WD17/2
---------	------------------	-------	-----	------	-----	----	----	------	-----	--------

