


INTERMERCATO Rotating Five Finger Grapple - Worm Drive

HIGH
TORQUE
WORM DRIVE

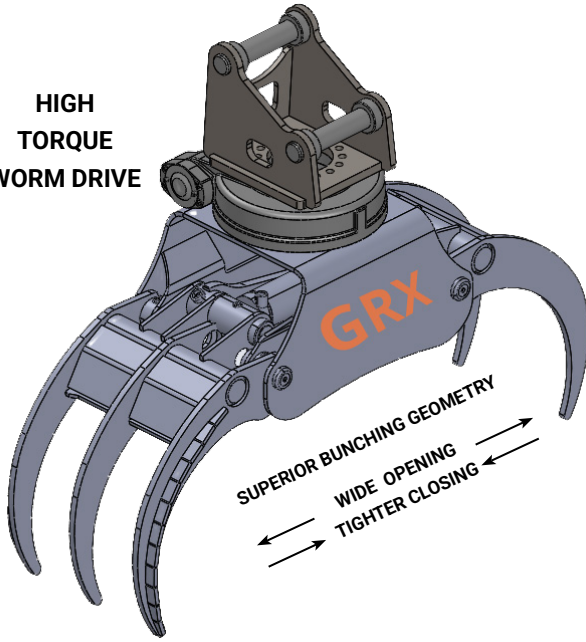

KEY FEATURES

Head Bracket - Aussie Made

- Bolt-on, flat for tilt hitch or angled for upright tree/pole handling

Grapple - Made in Europe

- Hardox for strength and durability
- Exclusive long finger design for better penetration and material control
- Optimized geometry for better bunching
- Hydraulic – operates independently from the dipper for full range of movement

Worm Drive Rotator

- 360° rotation with specially designed low gearing for a long life
- NSL – non self-locking design protects worm drive
- Holds load at any angle (optional brake)
- Feed chippers without moving the machine
- Grip trees upright, then lower safely

Optional solenoid if only one set of auxiliaries available

XCMG MODELS	MODEL SPECIFICATIONS	RIGID	WEIGHT	GRIP AREA	PRESSURE	FLOW	CLAMPING	OPENING WIDTH	CLOSING WIDTH	WORM DRIVE ROTATOR
		ton	Kg	m ²	Bar	l/min	kN			
XE17U & XE19U	GRX10-5 WD7	1.5-2	125	0.11	200	15-30	7.2	976	60	WD7
XE27U	GRX15-5 WD7	2.0-3.5	185	0.14	200	20	7.2	940	63	WD7
XE35U	GRX20-5 WD9	3.5-5.5	285	0.19	200	30	11.3	1234	78	WD9
XE55U	GRX25-5 WD9	5.0-7.5	375	0.24	250	40	15	1385	85	WD9
XE90U	TG28SR5 WD14	7.0-12	500	0.30	250	60	15	1500	95	WD14
XE90U	GRX30-5 WD14/2	8.0-12	480	0.29	300	50	18.3	1587	105	WD14/2
XE155UCR	TG55SR5 WD21/2	16-21	1235	0.65	250	90	25	2425	150	WD21/2
HEAVY DUTY OPTION										
XE155UCR	GX28-50/5 WD17/2	12-18	800	0.28	350	60	20	1486	130	WD17/2
XE310LC	GX36-50/5 WD25/2	24-30	1350	0.36	350	60	20	1800	135	WD25/2