


# CASE

## CONSTRUCTION

# INTERMERCATO

## Rotating Five Finger Grapple - Worm Drive

HIGH  
TORQUE  
WORM DRIVE

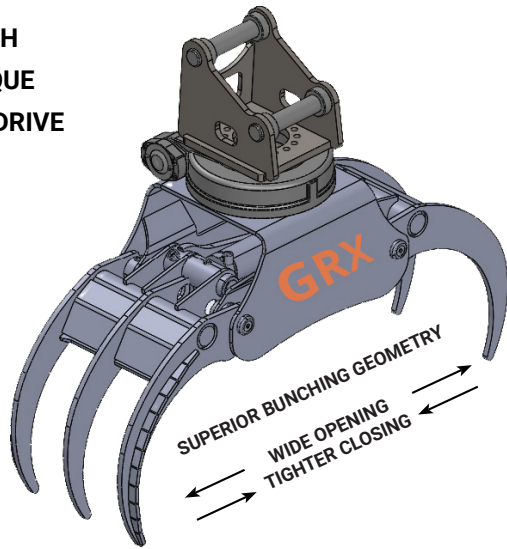

### KEY FEATURES

#### Head Bracket - Aussie Made

- Bolt-on, flat for tilt hitch or angled for upright tree/pole handling

#### Grapple - Made in Europe

- Hardox for strength and durability
- Exclusive long finger design for better penetration and material control
- Optimized geometry for better bunching
- Hydraulic – operates independently from the dipper for full range of movement

#### Worm Drive Rotator

- 360° rotation with specially designed low gearing for a long life
- NSL – non self-locking design protects worm drive
- Holds load at any angle (optional brake)
- Feed chippers without moving the machine
- Grip trees upright, then lower safely
- Optional solenoid if only one set of auxiliaries available

CASE MODELS	MODEL SPECIFICATIONS	RIGID	WEIGHT	GRIP AREA	PRESSUR E	FLOW	CLAMPING	OPENING WIDTH	CLOSING WIDTH	WORM DRIVE
		 ton	 Kg	 m <sup>2</sup>	 Bar	 l/min	 kN			
CX17	GRX10-5 WD7	1.5-2	125	0.11	200	15-30	7.2	976	60	WD7
CX25D, CX33C & CX35D	GRX15-5 WD7	2.0-3.5	175	0.14	200	20	7.2	940	63	WD7
CX37C	GRX20-5 WD9	3.5-5.5	285	0.19	200	30	11.3	1234	78	WD9
CX58D	GRX25-5 WD9	5.0-7.5	375	0.24	250	40	15	1385	85	WD9
CX75C & CX80C	TG42SR5 WD14	7.0-12	500	0.30	250	60	15	1500	95	WD14
CX75C & CX80C	GRX 30-5 WD14/2	8.0-12	480	0.29	300	50	18.3	1587	105	WD14 /2
CX130C & CX145CSR	TG42SR5 WD17/2	12-16	650	0.50	250	70	25	1895	100	WD17/2
<b>HEAVY DUTY OPTION</b>										
CX130C, CX145CSR & CX160C	GX28-50/5 WD17/2	12-18	800	0.28	350	60	20	1486	130	WD17/2
CX210C	GX36-50/5 WD21/2	18-24	1250	0.36	350	60	20	1800	135	WD21/2
CX250C, CX235CSR & CX300C	GX36-50/5 WD25/2	24-30	1350	0.36	350	60	20	1800	135	WD25/2
CX300C	GX55-50/5 WD25/2	24-32	2500	0.50	350	70	50	2295	145	WD25/2

# INTERMERCATO

High performance lift and load attachments for Forestry, Transport, Construction and Recycling.

