




INTERMERCATO Rotating Five Finger Grapple - Worm Drive

HIGH
TORQUE
WORM DRIVE

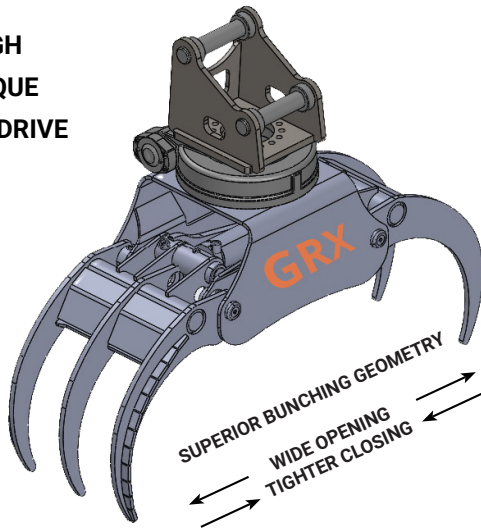

KEY FEATURES

Head Bracket - Aussie Made

- Bolt-on, flat for tilt hitch or angled for upright tree/pole handling

Grapple - Made in Europe

- Hardox for strength and durability
- Exclusive long finger design for better penetration and material control
- Optimized geometry for better bunching
- Hydraulic – operates independently from the dipper for full range of movement

Worm Drive Rotator

- 360° rotation with specially designed low gearing for a long life
- NSL – non self-locking design protects worm drive
- Holds load at any angle (optional brake)
- Feed chippers without moving the machine
- Grip trees upright, then lower safely
- Optional solenoid if only one set of auxiliaries available

JCB MODELS	MODEL SPECIFICATIONS	RIGID 	WEIGHT 	GRIP AREA 	PRESSURE 	FLOW 	CLAMPING 	OPENING WIDTH 	CLOSING WIDTH 	WORM DRIVE
18Z & 19C	GRX10-5 WD7	1.5-2	125	0.11	200	15-30	7.2	976	60	WD7
25Z, 26C & 35Z	GRX15-5 WD7	2.0-3.5	175	0.14	200	20	7.2	940	63	WD7
36C, 50Z & 55Z	GRX20-5 WD9	3.5-5.5	285	0.19	200	30	11.3	1234	78	WD9
50Z, 55Z & 3CX	GRX25-5 WD9	5.0-7.5	375	0.24	250	40	15	1385	85	WD9
85Z, 86C, 90Z & 4CX	TG28SR5 WD14	7.0-12	500	0.30	250	60	15	1500	95	WD14
86C, 90Z, 100C & 5CX	GRX 30-5 WD14/2	8.0-12	480	0.29	300	50	18.3	1587	105	WD14 /2
140X, 110W	TG42SR5 WD17/2	12-16	650	0.50	250	70	25	1895	100	WD17/2
JS145W, JS160W & JS175W	TG55SR5 WD21/2	16-21	1235	0.65	250	90	25	2425	150	WD21/2
HEAVY DUTY OPTION										
140X, 145XP & JS145W	GX28-50/5 WD17/2	12-18	800	0.28	350	60	20	1486	130	WD17/2
220X & JS200W	GX36-50/5 WD21/2	18-24	1250	0.36	350	60	20	1800	135	WD21/2
245XR	GX36-50/5 WD25/2	24-30	1350	0.36	350	60	20	1800	135	WD25/2



High performance lift and load attachments for Forestry, Transport, Construction and Recycling.

