


HIGH
TORQUE
WORM DRIVE



KEY FEATURES

Head Bracket - Aussie Made

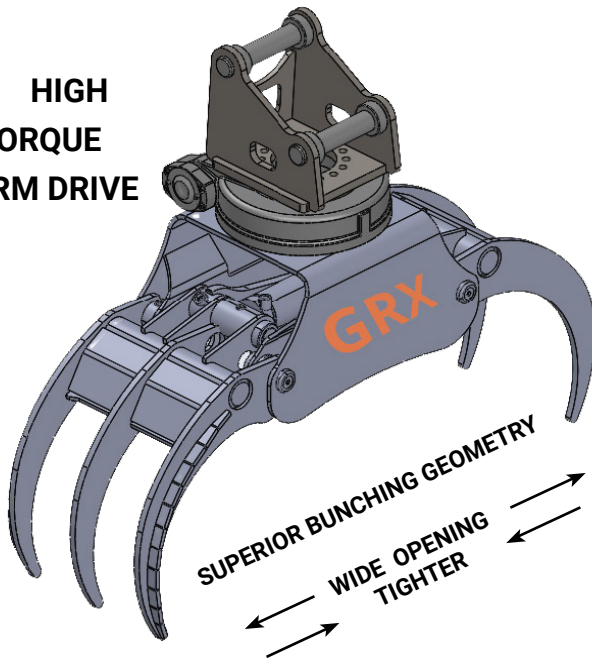








- Bolt-on, flat for tilt hitch or angled for upright tree/pole handling

Grapple - Made in Europe

- Hardox for strength and durability
- Exclusive long finger design for better penetration and material control
- Optimized geometry for better bunching
- Hydraulic – operates independently from the dipper for full range of movement

Worm Drive Rotator

- 360° rotation with specially designed low gearing for a long life
- NSL – non self-locking design protects worm drive Holds load at any angle (optional brake)
- Feed chippers without moving the machine
- Grip trees upright, then lower safely
- Optional solenoid if only one set of auxiliaries available

SUMITOMO MODELS	MODEL SPECIFICATIONS	RIGID 	WEIGHT 	GRIP AREA 	PRESSURE 	FLOW 	CLAMPING 	OPENING WIDTH 	CLOSING WIDTH 	WORM DRIVE ROTATOR 
SH75 & SH80	TG28SR5 WD14	7.0-12	500	0.30	250	60	15	1500	95	WD14
SH80	GRX30-5 WD14/2	8-12	480	0.29	300	50	18	1587	105	WD14/2
SH130 & SH145	TG42SR5 WD17/2	12-16	650	0.50	250	70	25	1895	100	WD17/2
HEAVY DUTY OPTION										
SH130, SH145 & SH180	GX28-50/5 WD17/2	12-18	800	0.28	350	60	20	1486	130	WD17/2
SH210	GX36-50/5 WD21/2	18-24	1250	0.36	350	60	20	1800	135	WD21/2
SH235, SH250 & SH300	GX36-50/5 WD25/2	24-30	1350	0.36	350	60	20	1800	135	WD25/2
SH300 & SH330	GX55-50/5 WD25/2	24-32	2500	0.50	350	70	50	2295	145	WD25/2