





TIGERGRIP / DEMOLITION SORTING GRAB

TG15 - 30DG

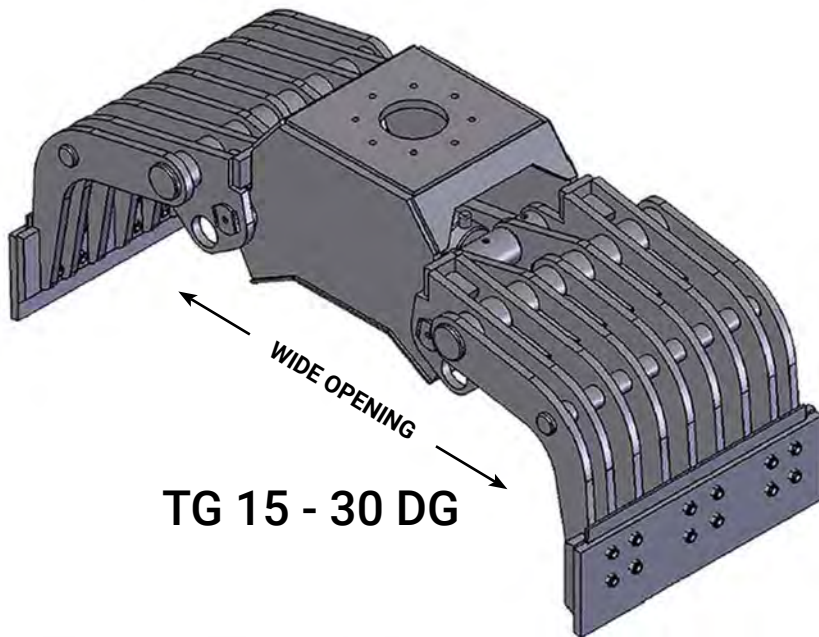

KEY FEATURES

- Heavy duty
- Double guide bars
- High pressure cylinder with double piston rod seals
- High tensile wear resistant steel (400 HB)
- Extra reinforced body for rigid mounting - Excavator design
- Self lubricating bushings (not TG15 - 18DG)
- Reversible cutting edges
High tensile wear resistant steel cutting edges (500 HB)
- Pilot operated check valve
- OPTIONAL ROTATOR
- See RMR Series

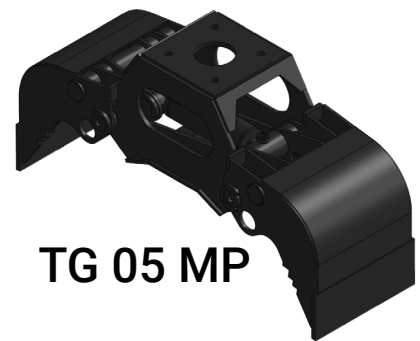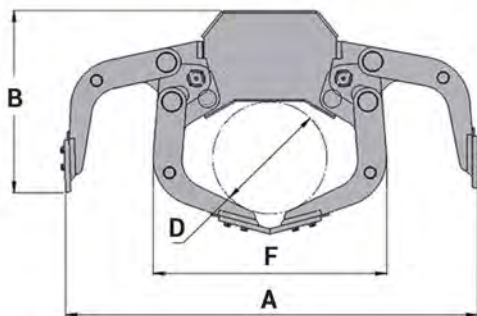

MODEL SPECIFICATIONS	WEIGHT	GRIP	PRESSURE	FLOW	CLAMPING	RIGID								
	Kg	m ²	Bar	l/min	kN	ton	TG 05 MP	TG 15 DG	TG 18 DG	TG 20 DG	TG 20 DGW	TG 25 DGL	TG 25 DG	TG 30 DG
TG 05 MP	86	0.02	250	20	12.4	1-3.5								
TG 15 DG	190	0.14	250	60	17.5	3-6	A	904	1154	1430	1556	1556	1936	2347
TG 18 DG	358	0.18	250	60	18.5	5-8	B	457	535	632	737	737	893	1057
TG 20 DG	495	0.20	320	60	33	7-11	C	500	661	745	897	897	1095	1297
TG 20 DGW	650	0.20	320	60	33	8-13	D	-	315	370	430	430	530	650
TG 25 DGL	850	0.35	320	90	57	12-18	E	300	390	532	532	680	800	1000
TG 25 DG	975	0.35	320	90	57	15-22	F	-	650	847	882	882	1085	1330
TG 30 DG	1465	0.50	320	90	69	20-30								

INTERMERCATO

High performance lift and load attachments for Forestry, Transport, Construction and Recycling.

