


ROTECH | WD-WORMDRIVE

RIGID MOUNT ROTATORS WD7 - WD25 NSL

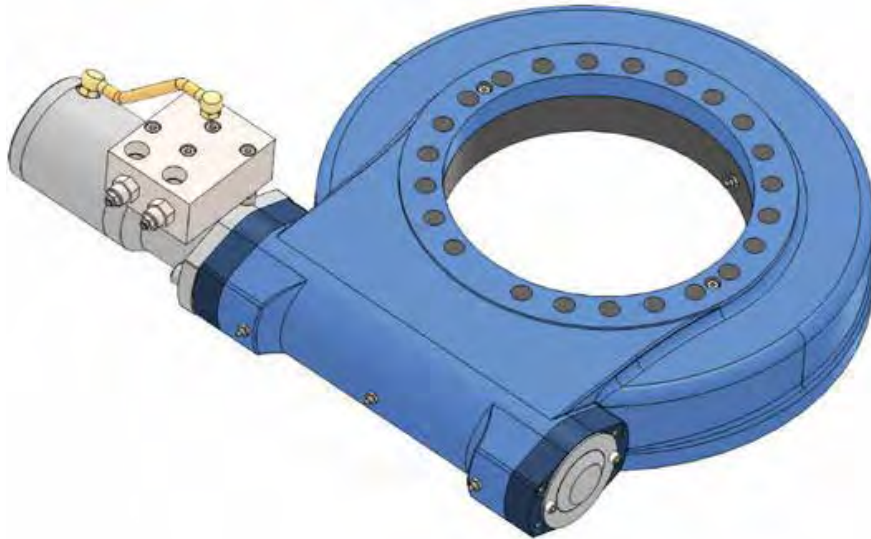

NON SELFLOCKING WORM DRIVE

KEY FEATURES

- Holds load steady at any angle (with brake)
- Steel gears
- High pressure construction
- High torque
- Optimized positioning performance
- Steel flange for increased durability
- Ultra compact design
- Endless 3600
- Optional Brake
- Pressure regulated block

MODEL SPECIFICATIONS	WEIGHT kg	PRESSURE Bar	FLOW l/min	TORQUE kN	RIGID kN	Max Rev/Min	Holding Torque kNm	STATIC AXIAL RATING kN	Radial load static kN	Radial load dynamic kN	Height mm	Gear Ratio
WD 7 NSL	40	140	17	2180	1-4.5	6.0	20	220	90	50	85	23:1
WD 9 NSL	62	140	20	2880	4.5-8	5.0	38	578	215	115	108	31:1
WD 14 NSL	90	140	30	4000	8-14T	6.0	48	960	360	200	108	43:1
WD 14/2 NSL	110	140	60	8000	12-18T	6.0	48	960	360	200	108	43:1
WD 19 NSL	130	140	60	8410	15-25T	5.0	86	1800	675	250	110	47:1
WD 25 NSL	230	140	60	9300	23-35T	5.0	158	2360	945	470	120	52:1

INTERMERCATO

High performance lift and load
attachments for Forestry, Transport,
Construction and Recycling.

