


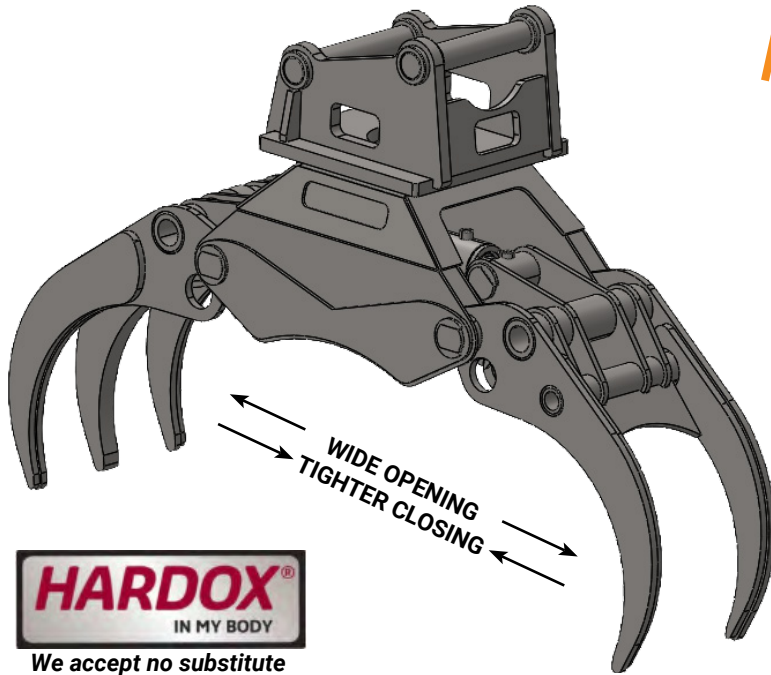


Strength • Control • Versatility

Built tough for chipping, land clearing, demolition and heavy-duty handling. The rigid, non-rotating mount delivers unmatched stability, power and precision.

KEY FEATURES

- Aussie Made Head Bracket – Bolt-on design, flat or angled for tree/pole handling
- European Grapple – HARDOX® construction, wide opening, tight closing
- Exclusive Finger Design – Longer for penetration, control and bunching
- Massive Clamp Force – Unshakable grip on the toughest materials
- Versatile & Durable – Logs, chippers, rocks, scrap, forestry, recycling, demolition
- Low Maintenance – Robust, simple build for long service life
- Future Ready – Rotator can be added later



Rotator – upgrade now or later



Why Intermecato?

- European engineered, proven in Australia
- Fits a wide range of excavators
- Backed by local expertise & support

MODEL SPECIFICATIONS	RIGID MOUNTING 	WEIGHT INCL. HEADBRACKET 	WEIGHT 	OPEN WIDTH 	CLOSED WIDTH 	CHASSIS WIDTH 	CLAMPING 	GRIP AREA 	PRESSURE 	FLOW 
	ton	Kg	Kg				kN	m ²	Bar	l/min
GRX10-5	1-2	80	66	970	38	273	7	0.10	200	15-30+
GRX15-5	2-3.5	110	95	940	63	316	7	0.14	200	20-50
GRX20-5	3.5-5.5	185	170	1234	78	377	11	0.19	250	20-50
GRX25-5	5-8	270	250	1385	85	419	15	0.24	250	20-50
TG 28 SR5	8-12	350	300	1500	95	512	15	0.30	250	60
TG 35 SR5	10-12	450	400	1890	65	522	18	0.38	250	60
TG 42 SR5	12-16	560	480	1895	100	530	25	0.50	250	70
TG 55 SR5	16-24	960	860	2425	150	635	25	0.65	250	90
SUPER HEAVY DUTY										
GX28-50/5	12-18	600	495	1486	130	632	20	0.28	350	60
GX36-50/5	20-30	900	720	1800	135	658	20	0.36	350	60
GX55-50/5	25-32	1935	1735	2295	145	1010	50	0.50	350	70