



# ROTECH


## UP TO 5.5T PENDULUM ROTATORS

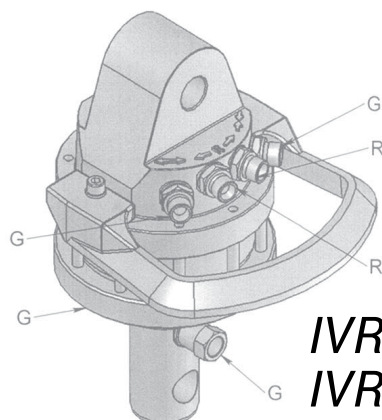



IVR 3-74  
IVR 4.59  
IVR 5.69

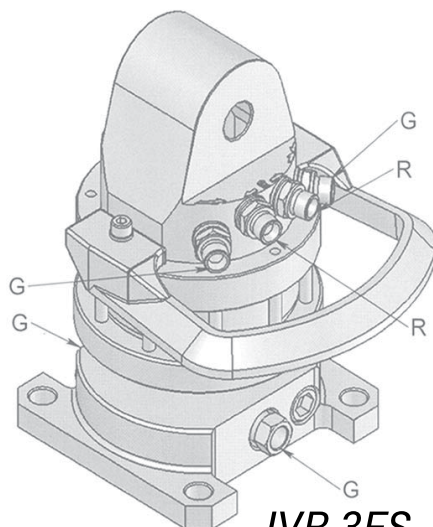

IVR 3FS  
IVR 4FS

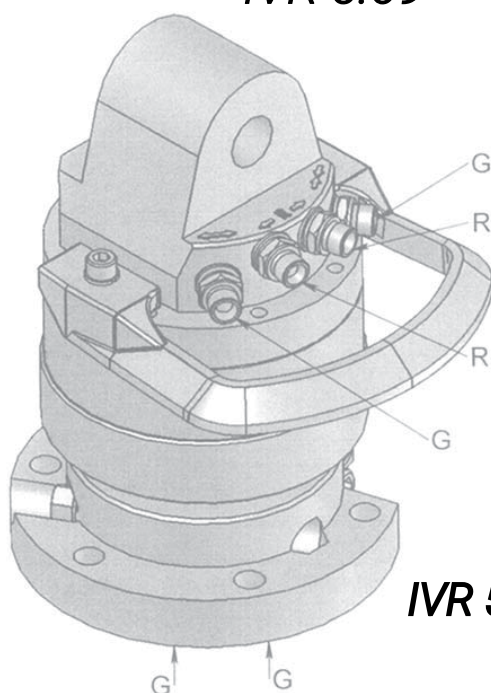

IVR 5 F6

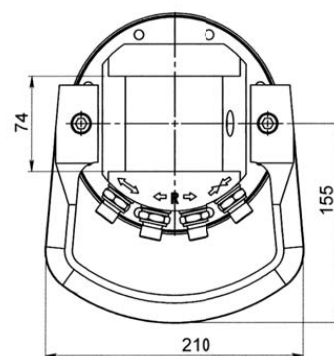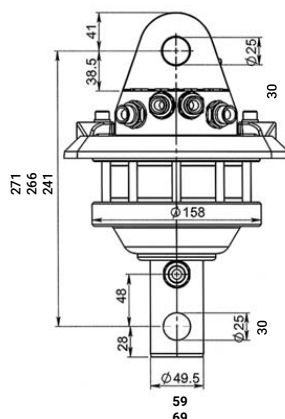

### KEY FEATURES

- For cranes & excavators
- Endless rotation
- High torque
- Low maintenance
- Hose protection included
- 360°
- 3/8" connectors
- Flange or shaft

MODEL SPECIFICATIONS	WEIGHT	STATIC	PRESSURE	FLOW		TORQUE	FORESTRY	CARGO	PENDULUM	SHAFT/ FLANGE	TOP PIN	BOTTOM PIN				
	 Kg	 ton	 Bar	 l/min												
	IVR 3-74	17	3	250/300	10	280	700	-	8				3	49.5	25	25
	IVR 3 FS	21	3	250/300	10	280	700	-	8				3	4/140	25	-
	IVR 4.59	23.5	4.5	250/300	12	385	1100	5	15				5	59	25	30
	IVR 4 FS	28	4.5	250/300	12	385	1100	5	15				5	4/140	25	-
	IVR 5.69	25	5.5	250/300	15	400	1100	6	20				6	69	30	30
	IVR 5 F6	30	5.5	250/300	15	400	1100	6	20				6	6/173	30	-

# INTERMERCATO

High performance lift and load  
attachments for Forestry, Transport,  
Construction and Recycling.

