
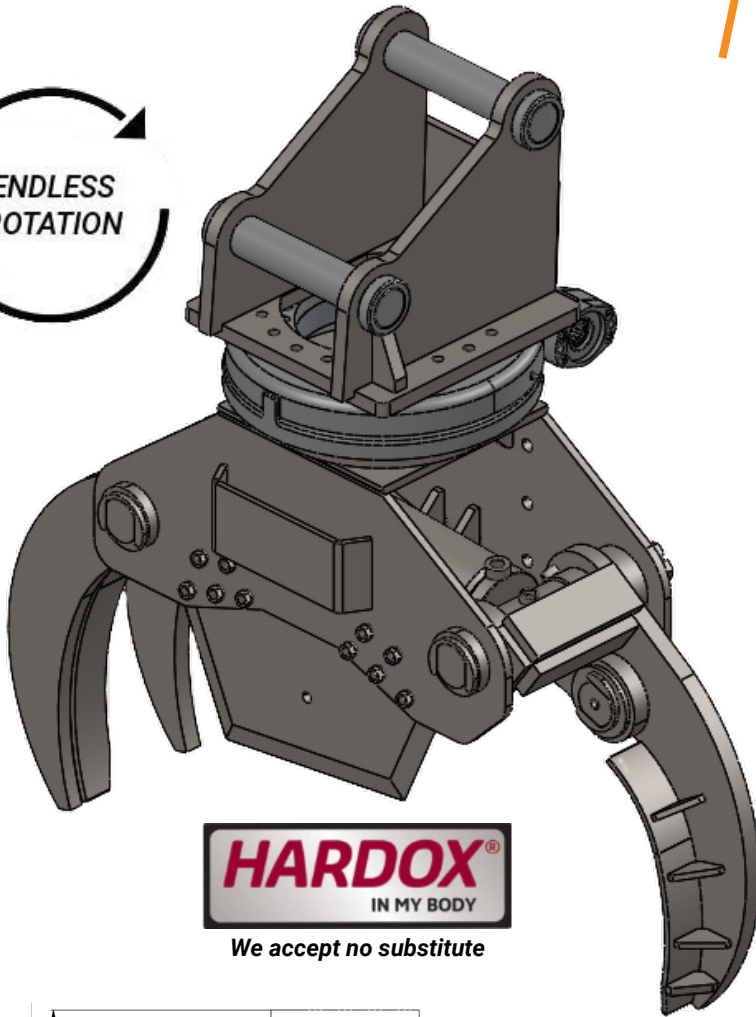




We accept no substitute

KEY FEATURES

Head Bracket - Aussie Made

- Bolt-on, flat for tilt hitch or angled for upright tree/pole handling

Worm Drive Rotator


- 360° rotation with specially designed low gearing for a long life
- Holds load at any angle (with brake)
- NSL – non self-locking design protects worm drive

Shear - Made in Europe

- Fixed Knife Design Simple, robust construction with minimal moving parts for long service life.
- Double-Bevel HARDOX® 450 steel blades engineered for clean, efficient cuts.
- Low Maintenance Fewer wear components = less downtime in the field
- Dual-Function Capability Blade can be removed to use as an accumulating grapple.
- Perfect for avocado and macadamia limb removal and maintenance.

Optional solenoid if only one set of auxiliaries available

Transform your excavator's performance. Talk to us today!

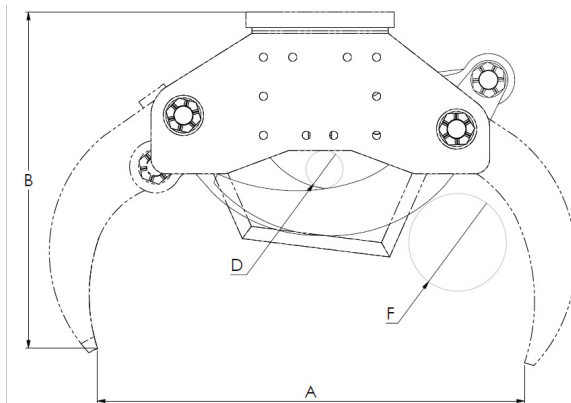

**CUTS ON
DOUBLE JAW**

MODEL SPECIFICATIONS	RIGID 	CUTTING DIAMETER SOFTWOOD 	WEIGHT Kg 	CUTTING kN 	PRESSURE Bar 	FLOW l/min 	CYLINDER BORE 	OPENING WIDTH 	CLOSED WIDTH 
TC210R WD9	4T - 7T	210	300	53	250	50	110	1140	75
TC250R WD14	8T - 14T	250	470	74	250	70	125	1096	95
TC300R WD17/2	15T - 19T	300	950	120	300	70 - 100	140	1413	85
TC300R WD21/2	17T - 25T	300	1060	120	300	70 - 100	140	1413	85