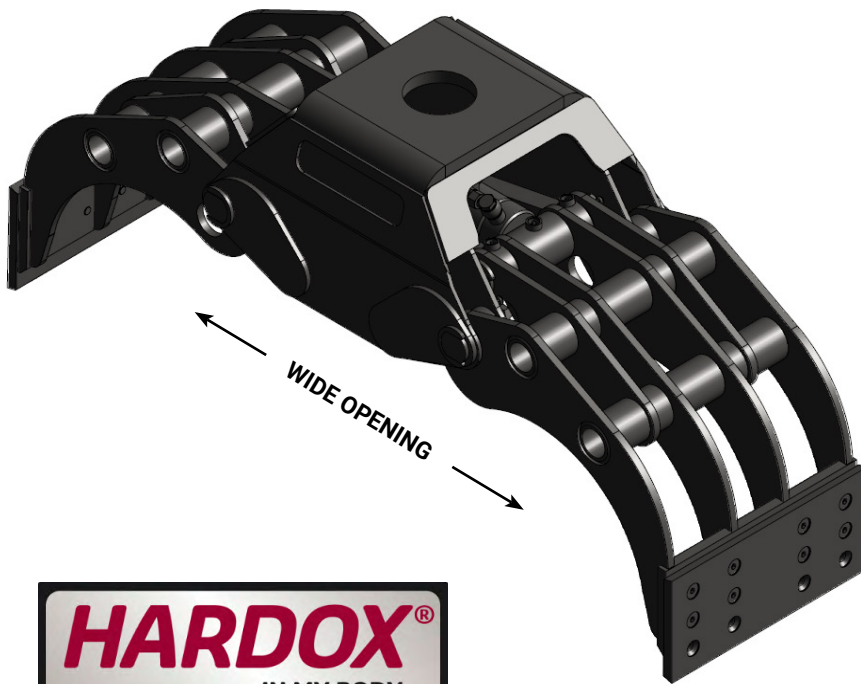


INTERMERCATO

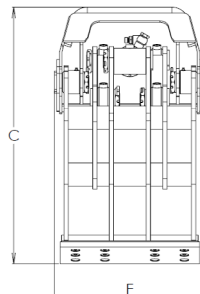
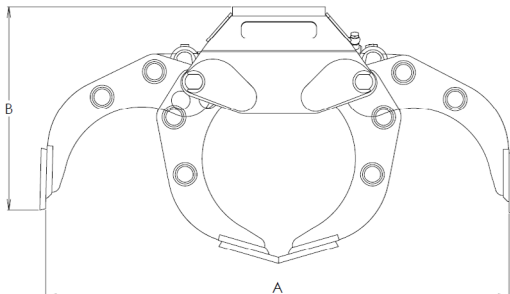
Sorting Grab TG16 - 42EG










We accept no substitute

KEY FEATURES

- Match with any rotator – RMR series for fast sorting or Worm Drive for positioning
- Heavy duty
- Double guide bars
- Cylinder with double piston rod seals for high pressures
- HARDOX - high tensile wear resistant steel (400 HB)
- HARDOX - Reversible cutting edges in high tensile wear resistant steel (400 HB)
- Pilot operated check valve optional



	TG 16 EG	TG 22 EG	TG 28 EG	TG 42 EG
A	880	1240	1595	2034
B	530	550	700	852
C	575	695	884	1084
E	345	432	518	533

MODEL SPECIFICATIONS	WEIGHT 	GRIP AREA 	PRESSURE 	FLOW 	CLAMPING 	CAPACITY 	RIGID 				
	Kg	m ²	Bar	l/min	kN	ton	ton				
TG 16 EG	95	0.08	200	20-30	7	1	1-4				
TG 22 EG	185	0.12	250	40	14	2	4-8				
TG 28 EG	355	0.20	250	50	18.5	5	8-12				
TG 42 EG	520	0.34	250	60	24	8	12-16				



High performance lift and load attachments for Forestry, Transport, Construction and Recycling.

