


INTERMERCATO / Sorting Grab

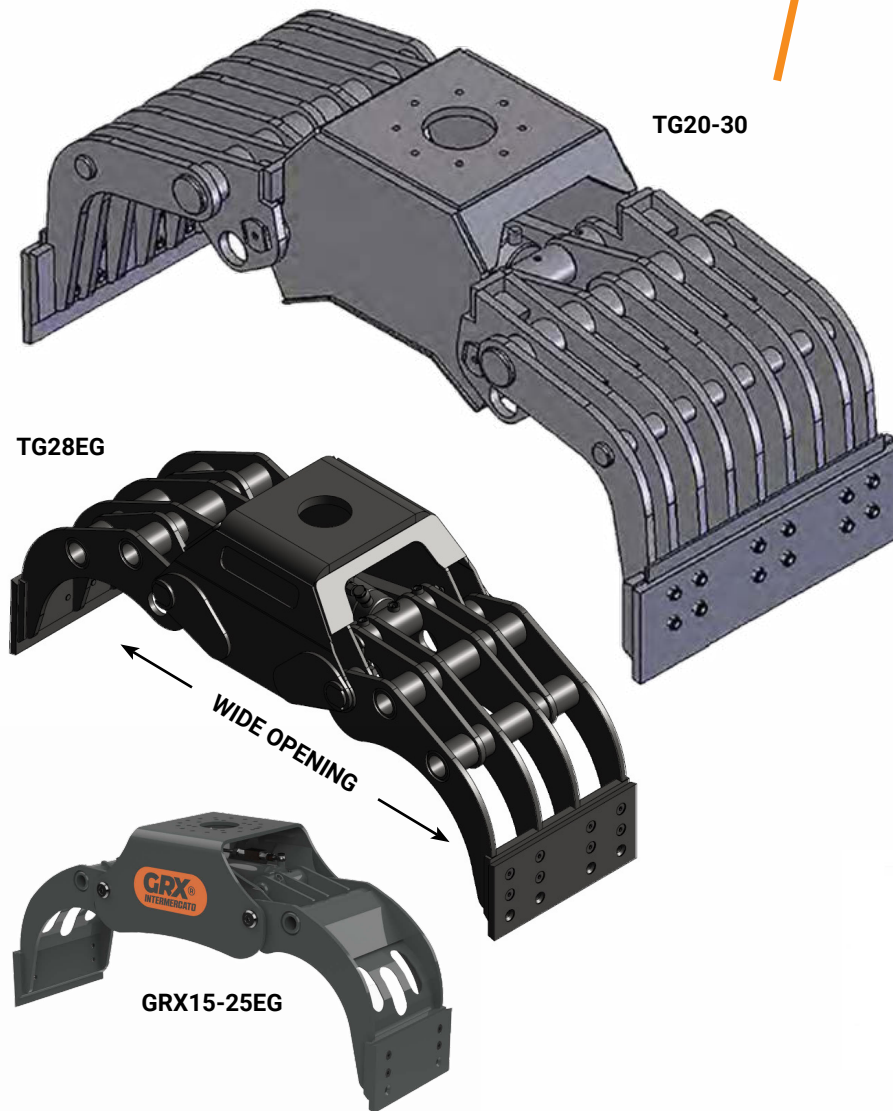

TG20-30

TG28EG

GRX15-25EG

KEY FEATURES

- Optional rotator
- Heavy duty
- Double guide bars - TG Series
- Cylinder with double piston rod seals for high pressure
- HARDOX - high tensile wear resistant steel (400 HB)
- **HARDOX - Reversible cutting edges in high tensile wear resistant steel (400 HB)**
- Pilot operated check valve optional



We accept no substitute



MODEL SPECIFICATIONS	RIGID MOUNTING 	WEIGHT INCL. HEADBRACKET 	WEIGHT 	GRIP AREA 	PRESSURE 	FLOW 	CLAMPING 	OPENING WIDTH 	CUTTING EDGE WIDTH 
GRX10EG	1-2	80	68	0.8	200	15	7	950	345
GRX15EG	1-3.5	117	102	0.1	200	20	7	1150	365
GRX20EG	3.5-6	205	180	0.14	250	30	11	1300	395
GRX25EG	5-8	300	263	0.19	250	40	15	1500	440
TG28EG	7-12	400	355	0.2	250	50	19	1600	520
DEMOLITION SERIES - HEAVY DUTY									
TG20DG	10-16	750	650	0.2	300	60	33	1560	530
TG25DGL	14-24	975	850	0.35	300	90	57	1940	800
TG25DG	14-26	1100	975	0.35	300	90	57	1940	800
TG30DG	22-32	1600	1465	0.5	300	90	69	2350	1000

INTERMERCATO

High performance lift and load attachments for Forestry, Transport, Construction and Recycling.

