



INTERMERCATO Rotating Log Grab Worm Drive



HIGH TORQUE
WORM DRIVE
OR
FASTER RMR

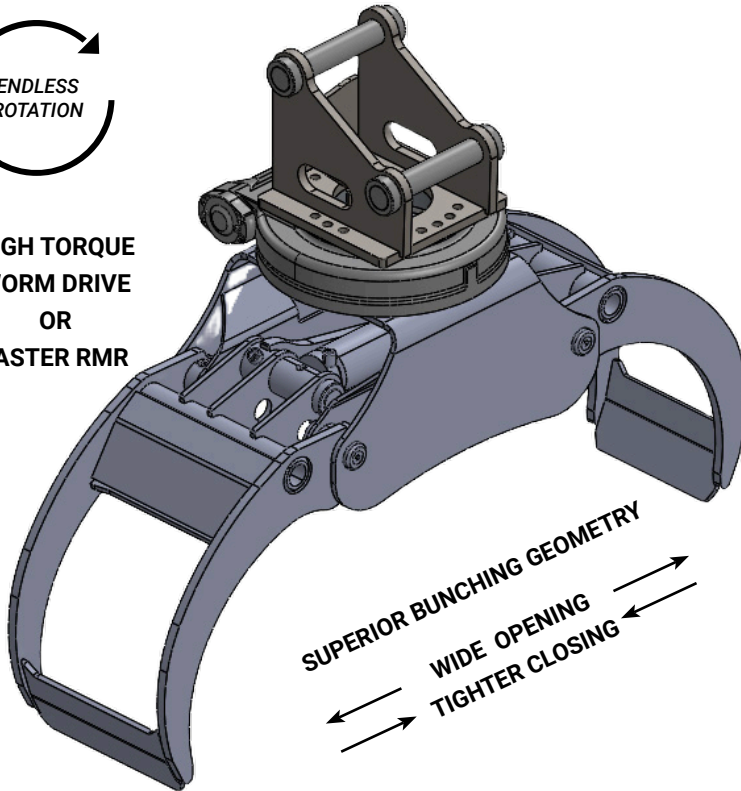

SUPERIOR BUNCHING GEOMETRY
WIDE OPENING
TIGHTER CLOSING

KEY FEATURES

Head Bracket - Aussie Made

- Bolt-on, flat for tilt hitch or angled for upright tree/pole handling

Worm Drive Rotator

- 360° rotation with specially designed low gearing for a long life
- NSL – non self-locking design protects worm drive
- Holds load at any angle (optional brake)
- Feed chippers without moving the machine
- Grip trees upright, then lower safely

Grapple - Made in Europe

- Hardox for strength and durability
- Exclusive long claw design for better penetration and material control
- Optimized geometry for better bunching
- Hydraulic – operates independently from the dipper for full range of movement

Optional solenoid if only one set of auxiliaries available

MODEL SPECIFICATIONS	RIGID 	WEIGHT 	GRIP AREA 	PRESSURE 	FLOW 	CLAMPING 	OPENING WIDTH 	CLOSING WIDTH 	WORM DRIVE ROTATOR 	OPTION RMR 
TG12S WD7	1.0-2.0	125	0.12	200	15-30	8.0	765	38	WD7	RMR3
TG16S WD7	2.0-3.5	185	0.16	200	20	9.0	925	60	WD7	RMR3
GRX20 WD9	3.5-5.5	285	0.19	200	30	11	1234	78	WD9	RMR6
GRX25 WD9	5.0-7.5	375	0.24	250	40	15	1385	85	WD9	RMR12
GRX25 WD14	6.0-8.0	410	0.24	250	40	15	1385	85	WD14	RMR12
TG28S WD14	7.0-12	500	0.30	250	60	15	1500	95	WD14	RMR12
TG35S WD14/2	10-12	540	0.38	250	60	18	1890	65	WD14/2	RMR12
TG42S WD17/2	12-16	650	0.50	250	70	25	1895	100	WD17/2	XR350
TG55S WD21/2	16-21	1235	0.65	250	90	25	2425	150	WD21/2	XR350

EXTREME DUTY - LOG GRAPPLE

TG42SM WD17/2	14-18	700	0.50	300	70	22	1830	100	WD17/2	XR350
TG42SM WD21/2	18-25	825	0.50	300	70	22	1830	100	WD21/2	XR400
TG55SM WD21/2	20-25	1335	0.65	300	90	25	2445	150	WD25/2	XR400

NEED BIGGER? JUST ASK!

INTERMERCATO

High performance lift and load
attachments for Forestry, Transport,
Construction and Recycling.

