
INTERMERCATO Rotating Five Finger Grapple - Worm Drive





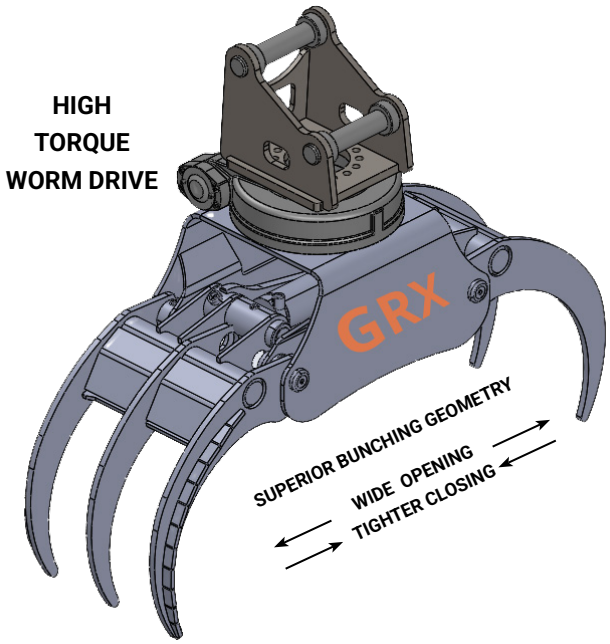

KEY FEATURES

Head Bracket - Aussie Made

- *Bolt-on, flat for tilt hitch or angled for upright tree/pole handling*

Grapple - Made in Europe

- *Hardox for strength and durability*
- *Exclusive long finger design for better penetration and material control*
- *Optimized geometry for better bunching*
- *Hydraulic – operates independently from the dipper for full range of movement*

Worm Drive Rotator

- *360° rotation with specially designed low gearing for a long life*
- *NSL – non self-locking design protects worm drive*
- *Holds load at any angle (optional brake)*
- *Feed chippers without moving the machine*
- *Grip trees upright, then lower safely*

Optional solenoid if only one set of auxiliaries available

XCMG MODELS	MODEL SPECIFICATIONS	RIGID ton	WEIGHT Kg	GRIP AREA m²	PRESSURE Bar	FLOW l/min	CLAMPING kN	OPENING WIDTH	CLOSING WIDTH	WORM DRIVE ROTATOR
XE17U & XE19U	GRX10-5 WD7	1.5-2	125	0.11	200	15-30	7.2	976	60	WD7
XE27U	GRX15-5 WD7	2.0-3.5	175	0.14	200	20	7.2	940	63	WD7
XE35U	GRX20-5 WD9	3.5-5.5	285	0.19	200	30	11.3	1234	78	WD9
XE55U	GRX25-5 WD9	5.0-7.5	360	0.24	250	40	15	1385	85	WD9
XE90U	TG28SR5 WD14	7.0-12	440	0.30	250	60	15	1500	95	WD14
XE90U	GRX30-5 WD14/2	8.0-12	485	0.29	300	50	18.3	1587	105	WD14/2
XE155UCR	TG55SR5 WD21/2	16-21	1235	0.65	250	90	25	2425	150	WD21/2
			HEAVY DUTY OPTION							
XE155UCR	GX28-50/5 WD17/2	12-18	800	0.28	350	60	20	1486	130	WD17/2
XE310LC	GX36-50/5 WD25/2	24-30	1350	0.36	350	60	20	1800	135	WD25/2