
INTERMERCATO

Five Finger Grab
GRX10 - GX55-50/5

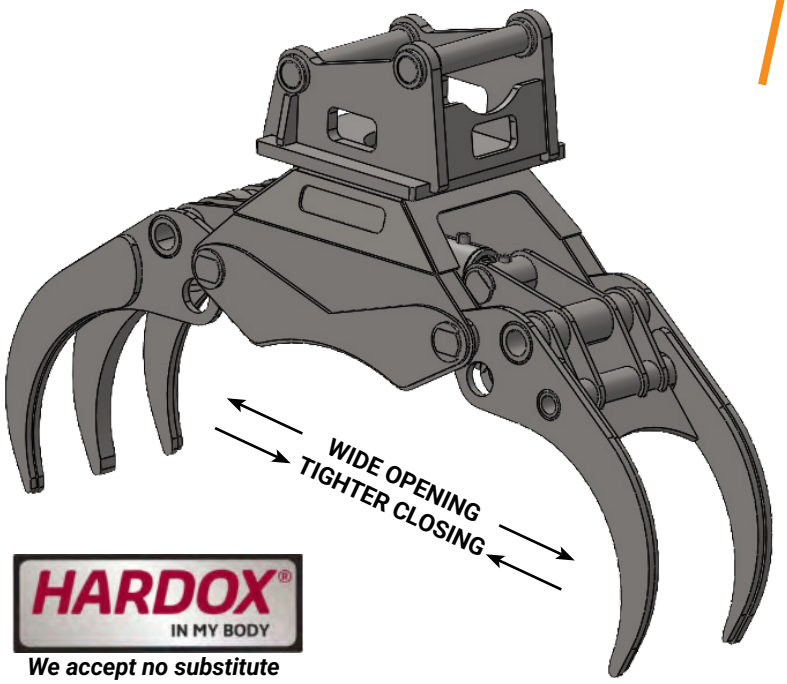

HARDOX® IN MY BODY


We accept no substitute

Strength • Control • Versatility

Built tough for chipping, land clearing, demolition and heavy-duty handling. The rigid, non-rotating mount delivers unmatched stability, power and precision.

KEY FEATURES

- *Aussie Made Head Bracket – Bolt-on design, flat or angled for tree/pole handling*
- *European Grapple – HARDOX® construction, wide opening, tight closing*
- *Exclusive Finger Design – Longer for penetration, control and bunching*
- *Massive Clamp Force – Unshakable grip on the toughest materials*
- *Versatile & Durable – Logs, chippers, rocks, scrap, forestry, recycling, demolition*
- *Low Maintenance – Robust, simple build for long service life*
- *Future Ready – Rotator can be added later*

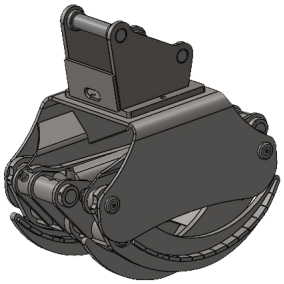

Rotator – upgrade now or later



Why Intermercato?

- ***European engineered, proven in Australia***
- ***Fits a wide range of excavators***
- ***Backed by local expertise & support***

MODEL SPECIFICATIONS	RIGID MOUNTING ton	WEIGHT INCL. HEADBRACKET Kg	WEIGHT Kg	OPEN WIDTH	CLOSED WIDTH	CHASSIS WIDTH	CLAMPING kN	GRIP AREA m²	PRESSURE Bar	FLOW l/min
GRX10-5	1-2	80	66	970	38	273	7	0.10	200	15-30+
GRX15-5	2-3.5	110	95	940	63	316	7	0.14	200	20-50
GRX20-5	3.5-5.5	190	170	1234	78	377	11	0.19	250	20-50
GRX25-5	5-8	270	250	1385	85	419	15	0.24	250	20-50
TG 28 SR5	8-12	350	300	1500	95	512	15	0.30	250	60
GRX30-5	8-12	375	325	1587	105	445	18.3	0.29	300	50
TG 42 SR5	12-16	560	480	1895	100	530	25	0.50	250	70
TG 55 SR5	16-24	960	860	2425	150	635	25	0.65	250	90
				SUPER HEAVY DUTY						
GX28-50/5	12-18	600	495	1486	130	632	20	0.28	350	60
GX36-50/5	20-30	900	720	1800	135	658	20	0.36	350	60
GX55-50/5	25-32	1935	1735	2295	145	1010	50	0.50	350	70

www.grapples.com.au | sales@grapples.com.au | Tel 1300 88 21 61 | Australia